



Selection aid, insulation

Approved cable and combination insulation,
according to EN1366-3 and EN13501-2

Building Connections

OBO
BETTERMANN


Selection aid and OBO Construct BSS

In addition to this selection aid as an overview, the appropriate materials can be determined using the online tools for insulation systems, Construct BSS for PCs or as an app for mobile devices.

The tools make material calculation and system selection easier: The solution to your fire protection problem is found by answering a few questions and inputting some key data, and you will receive an overview of the approved insulation systems as well as necessary and optional accessories. Shopping lists can be created, edited and exported. The approval documents can be accessed via a link.



Component properties

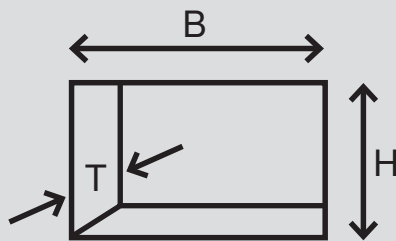

30 60 90 120 180 240

Installations



System overview



Other installations



Double solar pipes

PYROMIX®



Stainless steel with insulation + accompanying cable Ø 40 mm

PYROPLATE® Fibre



Stainless steel with insulation + accompanying cable Ø 40 mm



Air Condition

PYROMIX®



Tubolit Duo Split
Ø 6.0–18.0 mm

PYROPLATE® Fibre



Tubolit Duo Split
Ø 6.0–18.0 mm

PYROCOMB® Intube



2 x Ø 22 mm CU +
PEF 9.0 mm Ø 25 mm PVC +
3 cables Ø ≤ 14 mm



Speedpipe

PYROMIX®



24 pipes Ø 7 mm x 1.5 mm,
7 pipes Ø 10 mm x 2.0 mm,
5 pipes Ø 12 mm x 2.0 mm

PYROPLATE® Fibre



24 pipes Ø 7 mm x 1.5 mm,
7 pipes Ø 10 mm x 2.0 mm,
5 pipes Ø 12 mm x 2.0 mm

PYROCOMB® Intube



24 pipes Ø 7 mm x 1.5 mm,
7 pipes Ø 10 mm x 2.0 mm,
5 pipes Ø 12 mm x 2.0 mm



Hydraulic hoses

PYROMIX®



HANSA-FLEX HD 200-2 SN
Ø 55.9 mm



Plastic ducts

PYROBAG®



210 x 80 mm



Metal ducts

PYROBAG®



210 x 100 mm



Framework

PYROBAG®



Ø 200 mm,
Wall thickness 3.5 mm, PVC

PYROSIT® NG



Cardboard or plastic

PYROPLUG® Peg



PE-HD pipe
(ceiling)

OBO BETTERMANN Export GmbH & Co. KG
P.O. Box 1120
58694 Menden
GERMANY

Customer Service
Tel.: +49 (0)2373 89-1700
Fax: +49 (0)2373 89-1238
export@obo.de

www.obo-bettermann.com

Building Connections

